



ANALYSIS OF PROCESS INTENSIFICATION METHODS IN SHELL TUBE HEAT EXCHANGERS

B.J. Khursanov

Acting Associate Professor, Fergana State

Technical University, Fergana, Republic of Uzbekistan

E-mail: boyquzi.xursanov@fstu.uz

Abstract

The article describes the problems of heat exchange processes and devices and their solutions. Methods of intensification of processes in shell and tube heat exchangers are analyzed. Different turbulizers are used to speed up heat exchange. Turbulizers make the boundary layer of the heat-carrying medium on the surface of the pipes into a vortex or absorb it, as a result, the thermal resistance decreases and the heat transfer process is accelerated.

Keywords: Heat exchange, shell and tube device, internal and external surface, heat transfer coefficient, heat transfer coefficient, intensification method.

Introduction

In shell-and-tube heat exchangers, the cross-section between the inter-tube space is two or three times larger than the cross-section of the inside of the tube. Therefore, when the consumption of heat carriers and the condition of the unit are the same, the heat transfer coefficient on the surface of the inter-tube space is much lower, which reduces the overall heat transfer coefficient of the device. In addition, during the use of the device, the inner and outer surfaces of the pipe become dirty, as a result of which the overall heat transfer coefficient of the device decreases [1,2].



The purpose of the study

The main purpose of speeding up the operation of shell-and-tube heat exchangers is to equalize the thermal resistance on both sides of the heat exchange surface. In addition, the most effective and reasonable way to solve problems is to intensify the heat exchange in the pipes of heat exchangers and to clean the surfaces of the pipes [3,4,5]. .

Research methods

To intensify heat exchange processes, the following methods and operations are performed [6,7,8]:

- Forced turbulization of the flow. At small values of the Reynolds number Re , i.e., in non-turbulent regimes, the values of the heat transfer coefficient are reached to the values of the advanced turbulent regime by creating artificial turbulizer grids, convexity, pulsation generation and twisting flows.
- By installing ribs on the surfaces of the pipes, the heat exchange surface is increased several times;
- Prevention of pollution (sludge, salts, corrosion products) by systematic cleaning of pipes, coating of pipe surfaces with special coatings, cleaning of heat-carrying agents;
- Treating the inside of the pipe and the inter-pipe environment with inert gases before condensing the vapors [9,10,11,12]. .

Intensification of the heat exchange process gives the following positive results:

- the size of the heat exchange surfaces is reduced to deliver the same amount of heat;
- reliability and service life of heating surfaces increases;
- the mass of the heat exchanger is reduced and the external dimensions are smaller;
- formation of pollution on heat exchange surfaces is reduced;
- device productivity and operating time increases.

Currently, there are the following ways to intensify heat exchange [13,14,15]:

- transfer the heat carrier tangentially to the pipe;
- increase the artificial curvature of the pipe;
- internal longitudinal and transverse ribbing of the pipe;



-
- installation of auger rammers inside the pipe;
 - installation of a spiral spring in the pipe;
 - pipe internal and external nicking;
 - making the pipe a spiral point;
 - use of disc and puck turbulizers;
 - installation of tapes twisted into the pipe;
 - impact of electrostatic field on liquid flow;
 - use of diffuser-confuser type tubulizers;
 - vibration of the pipe and the device;
 - use of composite methods of intensification, etc.

Application of one of the methods of heat exchange intensification in a heat exchanger increases heat exchange by 1.5-2 times, reduces the rate of formation of layers on heat exchange surfaces up to 2 times, and increases hydraulic resistance of the device by 2-3 times [16,17,18].

Results

Various additions and modifications have been made to the shell and tube heat exchangers to intensify the processes. For example, in the author's certificate No. 345336, the apparatus consists of a shell, a grid of pipes with pipes, covers, and transverse barriers are made in the form of a screw to intensify heat exchange processes in the space between the pipes [19,20,21,22].

In the author's certificate No. 840662, in order to intensify the heat exchange processes, the tubes are turned helically. Disadvantages of this test construction: it is difficult to prepare, vibration starts in the apparatus at a high speed of liquids. Screw pipes are difficult to repair and prepare [23,24,25,26].

In the patent of the Russian Federation (patent RF 2299089, published in 2005), the pipes are arranged in a pipe network in a circle inside the shell. The presence of the medium in the pipe around the perimeter increases the turbulence of the fluid movement and, as a result, heat exchange processes are intensified. The disadvantage of this device is that the heat exchange coefficient is different in the central part and the periphery of the device. Second, the working volume within the shell is not uniformly used [27,28,29].

In patent No. 2372572 (patent RF 2372572, published in 2009) to improve the use of the working environment, the shell is made as a truncated cone, and the twisted pipes are placed in this truncated cone. The disadvantage of this construction: the construction is complicated, and it is difficult to prepare and repair such devices [30,31,32,33].

In the heat exchanger of V.M. Gureev (patent RF 2457415, published in 2012), in order to intensify the process and reduce metal consumption, the tubes inside the truncated cone are arranged by rotating along the axis of the cone [34,35,36,37,38]. In addition, in order to increase the intensity of heat exchange processes, the tubes inside the shell are made without forming, corrugated (item No. 868302), confusor and diffuser parts (item No. 1062500). In G.A. Dreitsler's design, there are small turbulizers inside the tubes and channels on the outside [2,3,5,39,40] (Fig. 1).

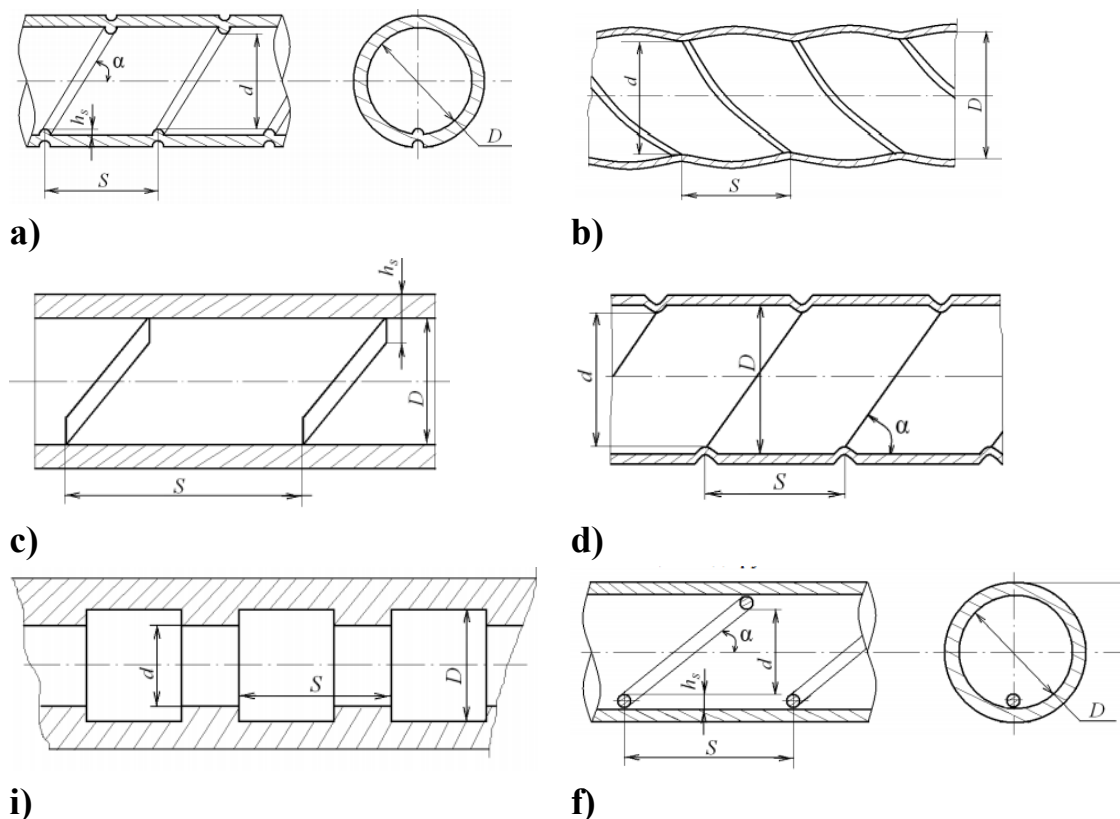


Figure 1[2,4,5,42]. Pipes with a turbulator: a - a pipe with spiral grooves, b - a spirally profiled pipe, c - tube with plate-like internal spiral, d - triangular grooved tube, i - tube with rectangular grooves, f - a groove in which a spiral wire is installed.



In R.A. Amerkhanov's apparatus (patent RF 2200289, 2008) there are turbulizers in the pipes, and film electric heaters are installed in these turbulizers [1,2,41,42,43,44].

Conclusions

New designs of heat exchangers should have a higher heat transfer coefficient than similar devices used in industry, be corrosion resistant, have less metal retention, and consume less energy to pass heat transfer agents through the device. One of the promising ways to create heat exchangers is to use surfaces where the working medium erodes the boundary layer. Turbulizer heat exchangers proposed by scientists are noteworthy in this regard.

References

1. Z. Salimov. Basic processes and devices of chemical technology. Textbook for students of higher educational institutions. T.1. - Tashkent: Uzbekistan, 1994. -366 p.
2. Кафаров В.В. Методы кибернетики в химии и химической технологии. - М.: Химия, 1985. – 448 с.
3. Бояринов А.И., Кафаров В.В. Методы оптимизации в химической технологии. - М.: Химия, 1975. – 575 с.
4. Дытнерский Ю.И. Процессы и аппараты химической технологии: Учебник для вузов. Изд. 2-е. В 2-х кн.: Часть 1. Теоретические основы процессов химической технологии. Гидромеханические и тепловые процессы и аппараты. - М.: Химия, 1995. -400 с.
5. Yusupbekov N.R., Nurmukhamedov H.S., Zukirov S.G. Chemical technology basic processes and devices. - Tashkent: "Sharq", 2003.
6. Mamarizayev, I., & Abdunazarov, A. (2022). Multi-stage bubble extractor with increased contact time. Eurasian Journal of Academic Research, 2(7), 112-116.
7. Komilova, K. (2022). Texnologik jarayonda qo 'llaniladigan qurilmalar tahlili. Eurasian Journal of Academic Research, 2(7), 106-111.



8. Хурсанов, Б. Ж., & Алиматов, Б. А. (2020). Экстракционное извлечение редких металлов из отвалов ГОК. *Universum: технические науки*, (6-1 (75)), 42-45.
9. Khursanov, B. J., & Abdullaev, N. Q. (2022). Influence on efficiency of gas quantity extraction process. *Eurasian Journal of Academic Research*, 2(6), 321-324.
10. Khursanov, B. J., & Honkeldiev, M. A. (2022). Energy-saving bubble extractor with extended contact time. *Eurasian Journal of Academic Research*, 2(6), 115-117.
11. Khursanov, B. J. (2022). Methods for calculating the economic efficiency of new technology. *World Economics and Finance Bulletin*, 10, 112-116.
12. Хурсанов, Б. Ж., & Алиматов, Б. А. (2020). Экстракционное извлечение редких металлов из отвалов ГОК. *Universum: технические науки*, (6-1 (75)), 42-45.
13. Khursanov, B. J. (2022). Extraction of rare metals from mining dumps in bubbling extractors. *American Journal Of Applied Science And Technology*, 2(05), 35-39.
14. Хурсанов, Б. Ж., & Алиматов, Б. А. (2022). Исследование Взаимного Уноса Фаз В Барботажном Экстракторе С Увеличенным Временем Контакта. *Central asian journal of theoretical & applied sciences*, 3(5), 28-33.
15. Дусматов, А. Д., Ахмедов, А. Ё., Абдуллаев, З. Ж., & Гапаров, К. Г. (2022). Междуслоевые сдвиги двухслойных комбинированных пластин и оболочек с учетом усадки композитных слоев. *Oriental renaissance: Innovative, educational, natural and social sciences*, 2(4), 133-141.
16. Хурсанов, В., Latifjonov, A., & Abdulhakov, U. (2021). Application of innovative pedagogical technologies to improve the quality of education. *Scientific progress*, 2(7), 689-693.
17. Хурсанов, В., & Abdullaev, N. (2021). Fundamentals of equipment of technological processes with optimal devices. *Scientific progress*, 2(7), 679-684.



18. Xursanov, B., & Akbarov, O. (2021). Calculation of gas volume in the mixing zones of extended contact time barbotage extractor. *Scientific progress*, 2(7), 685-688.
19. Алиматов, Б. А., Соколов, В. Н., Салимов, З. С., & Хурсанов, Б. Ж. (2003). Исследование распределения капель по размерам в многоступенчатом барботажном экстракторе. *Журнал прикладной химии*, 76(8), 1309-1311.
20. Karimov, I., Boykuzi, K., & Madaliyev, A. (2021). Volume-Surface Diameters of Drops in Barbotage Extractor. *International Journal of Innovative Analyses and Emerging Technology*, 1(5), 94-99.
21. Xursanov, B. J., Mamarizayev, I. M. O., & Akbarov, O.D.O. (2021). Operation of mixing zones of barbotage extractor in stable hydrodynamic regime. *Scientific progress*, 2(8), 170-174.
22. Xursanov, B. J., Mamarizayev, I. M. O., & Akbarov, O.D.O. (2021). Application of constructive and technological relationships in machines. *Scientific progress*, 2(8), 164-169.
23. Xursanov, B. J., Mamarizayev, I. M. O., & Abdullayev, N.Q.O. (2021). Application of interactive methods in improving the quality of education. *Scientific progress*, 2(8), 175-180.
24. Isomidinov, A., Boykuzi, K., & Khonnazarov, R. (2021). Effect of Rotor-Filter Device Operation Parameters on Cleaning Efficiency. *International Journal of Innovative Analyses and Emerging Technology*, 1(5), 100-105.
25. Isomidinov, A., Boykuzi, K., & Madaliyev, A. (2021). Study of Hydraulic Resistance and Cleaning Efficiency of Gas Cleaning Scrubber. *International Journal of Innovative Analyses and Emerging Technology*, 1(5), 106-110.
26. Алиматов, Б. А., & Хурсанов, Б. Ж. (1998). Расчет величины отстойной зоны барботажного экстрактора. *Науч. техн. журн. Ферг. политехн. ин-та. Фергана*, 1(2), 86-89.
27. Alimatov, B., & Khursanov, B. (2020). Analysis of droplets size distribution and interfacial surface during pneumatic mixing. *Asian Journal of Multidimensional Research (AJMR)*, 9(6), 165-171.
28. Алиматов, Б. А., Соколов, В. Н., & Хурсанов, Б. Ж. (2001). Влияние газосодержания на производительность барботажного экстрактора по



-
- тяжелой жидкости. НТЖ ФерПИ, Scientific-technical journal (STJ FerPI), 2, 93-94.
29. Ахунбаев, А. А., Туйчиева, Ш. Ш., & Хурсанов, Б. Ж. (2020). Учёт диссипации энергии в процессе сушки дисперсных материалов. *Universum: технические науки*, (12-1 (81)), 35-39.
30. Дусматов, А. Д., Хурсанов, Б. Ж., Ахроров, А. А., & Сулаймонов, А. (2019). Исследование напряженно деформированное состояние двухслойных пластин и оболочек с учетом поперечных сдвигов. In *Энерго-ресурсосберегающие технологии и оборудование в дорожной и строительной отраслях* (pp. 48-51).
31. Мирзахонов, Ю. У., Хурсанов, Б. Ж., Ахроров, А. А., & Сулаймонов, А. (2019). Применение параметров натяжного ролика при теоретическом изучении динамики транспортирующих лент. In *Энерго-ресурсосберегающие технологии и оборудование в дорожной и строительной отраслях* (pp. 134-138).
32. Алиматов, Б. А., Садуллаев, Х. М., Каримов, И. Т., & Хурсанов, Б. Ж. (2008). Методы расчета и конструирования жидкостных экстракторов с пневмоперемешиванием.
33. Khursanov, B. J. (2022). An Innovative Approach to the Design of Technical and Technological Processes of Production. *Eurasian Research Bulletin*, 11, 15-19.
34. Khursanov, B. J. (2022). The Factors of Ensuring Sustaining Manufacturing Competitiveness. *Eurasian Journal of Engineering and Technology*, 9, 93-100.
35. Yusupova, N. X., & Nomoanjonova, D. B. (2022). Innovative technologies and their significance. *Central asian journal of mathematical theory and computer sciences*, 3(7), 11-16.
36. Mamarizayev, I., & Abdunazarov, A. (2022). Multi-stage bubble extractor with increased contact time. *Eurasian Journal of Academic Research*, 2(7), 112-116.
37. Khursanov, B. J. (2023). Factors of Preparation of HighQuality Clinker in Rotary Kilns. *Eurasian Research Bulletin*, 17, 73-77.



-
38. Khursanov, B. J., & Mirzaev, D. B. (2023). Use of digital technologies in improving educational processes of technological machines and equipment specialists. *Science and innovation*, 2(Special Issue 3), 565-567.
 39. Khursanov, B. J. (2023). An innovative approach to the design of technical and technological processes of agricultural products production and increasing the technical level. *European Journal of Emerging Technology and Discoveries*, 1(2), 93-100.
 40. Tojimatovich, K. I., & Jurakuziyevich, K. B. (2023). Hydrodynamics of fluid transmission capacity of bubble extractor filter. *European Journal of Emerging Technology and Discoveries*, 1(2), 80-85.
 41. Khursanov, B. J. (2023). Improvement of Educational Processes in Specialized Subjects Based on Digital Technologies. *European Science Methodical Journal*, 1(3), 18-23.
 42. Б.Дж. Хурсанов. (2023). Методы анализа технологических систем переработки энергии. *Евразийский исследовательский вестник*, 21, 87-92.
 43. Хурсанова Бойкузи Журакузиевич. (2023). Гидродинамика перемешивания жидкостей в барботажных экстракторах. *European Journal of Interdisciplinary Research and Development*, 21, 161–166.
 44. Khursanov, B. J. (2023). Natural geographical and geocological problems and their solution. *International Journal of Advance Scientific Research*, Germaniya, 3(11), 296-301.